

SR4220PCB

Board-Mount Receptacles

SR4220PCB board-mount receptacles mate with all Datakey SlimLine™, Extended SlimLine, NFX, and RUGGEDrive™ memory tokens (see token data sheets for more details). The SR4220PCB receptacles feature a right-angle, board-edge design with through-hole contacts.

As with all Datakey SlimLine token receptacles, SR4220PCB receptacles feature corrosion-resistant, gold-dot contacts that perform reliably over a wear life of at least 50,000 insertion/removal cycles. The design employs a wiping mechanism to remove any debris or build-up on the token's contacts each time the token is inserted or removed. The receptacle includes a detent mechanism that gives users tactile and audible confirmation when an inserted token is physically engaged. The token/receptacle system also provides a Last-On/First-Off (LOFO) contact that is used by system designers to detect when a memory token has been inserted or removed (contact ATEK for token detection details for the NFX and RUGGEDrive memory tokens). The SR4220PCB receptacle is a modification of the SR4210PCB receptacle, where the mounting flange has been removed for space savings. Since the mounting flange has been removed, special care must be taken in the design of the mounting of these receptacles to ensure that excessive stress is not placed on the leads.



MECHANICAL	
Contact Life	50,000 Insertion/Removal Cycles Min.
Insertion Force	400 gf Min. / 2 kgf Max.
Removal Force	300 gf Min. / 2 kgf Max.
Vibration	15 g (three axes) Non-operating
ELECTRICAL	
Contact Resistance	Beginning of Life: 100 mΩ End of Life: 500 mΩ
ENVIRONMENTAL	
Storage Temperature	-40°C to +105°C
Operating Temperature	-40°C to +85°C
Relative Humidity	5% to 95% (non-condensing)
MATING COMPONENT(S)	
Tokens	All SlimLine, NFX, DFX and UFX Tokens
ORDERING INFORMATION ^{1,2}	
SR4220PCB	606-0055-000A

- 1: "A" suffix on part number indicates RoHS compliance. See CE declaration below for details.
- 2: Contact ATEK for part numbers of receptacles that ship in moisture bags (108/108 min/mult)
- 3: RST signal used on IIT series only.







NOTES:

- Complete interface specifications available at www.datakey.com
- Refer to recommended reflow instructions at www.datakey.com
- Conforms with Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011, and as amended by Directive 2015/863/EU, on the restriction of the use of certain hazardous substances in electrical and electronic equipment.



PIN-OUT CHART					RUGGEDrive™ LINE		
Pin	Microwire	I ² C	SPI	NFX	DFX (SPI)	DFX (SD)	UFX (USB)
Pin 1	LOFO	LOFO	/Hold	DP (USB)	Reserved	DAT1	NC
Pin 2	Power (V _{cc})	Power (V _{cc})	Power (V _{cc})	Power (V _{cc})	Data Out (DO)	DAT0	+5V
Pin 3	Chip Select (CS)	SIZE / RST ³	/Chip Select (/CS)	/Chip Select (/CS)	Ground (GND)	VSS	NC
Pin 4	Serial Clock (SK)	Serial Clock (SCL)	Serial Clock (SCK)	Serial Clock (SCK)	Serial Clock (SCLK)	CLK	DM
Pin 5	Data In (DI)	NC	Data In (SI)	MOSI	Power (V _{cc})	VDD	DP
Pin 6	Data Out (DO)	Serial Add/Data (SDA)	Data Out (SO)	MISO	Data In (DI)	CMD	NC
Pin 7	Ground (GND)	Ground (GND)	Ground (GND)	Ground (GND)	/Chip Select (/CS)	DAT3	GND
Pin 8	LOFO	LOFO	LOFO	DM (USB)	Reserved	DAT2	NC

NC = No Connection

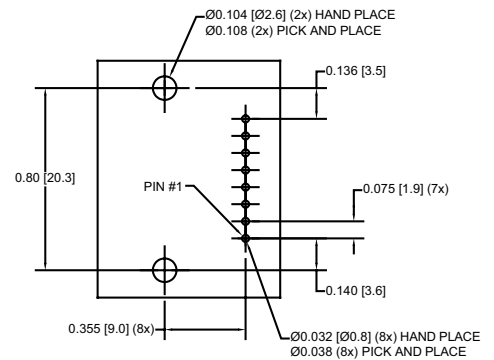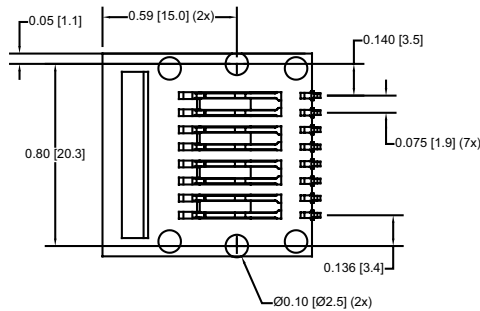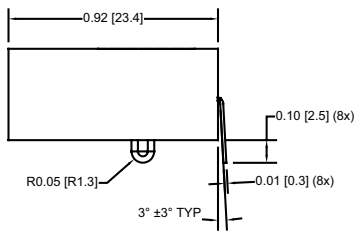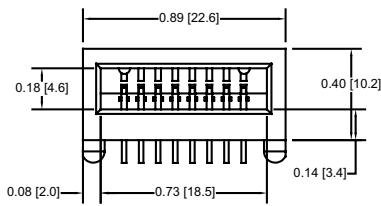

COMPONENT SIDE

PCB RECEPTACLE PATTERN LAYOUT

Drawing dimensions are in inches and millimeters [mm].
Dimensions are nominal and subject to manufacturer's tolerances.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

221-0128-000 Rev. N 7/21

View our full product line at www.datakey.com

ATEK Access Technologies
10025 Valley View Road, Ste. 190
Eden Prairie, MN 55344 U.S.A.

PH: 1.800.523.6996
FAX: 1.800.589.3705
+1.218.829.9797

www.atekaccess.com



Access the power of technology.